


FIREPIT BURNER/PAN KIT

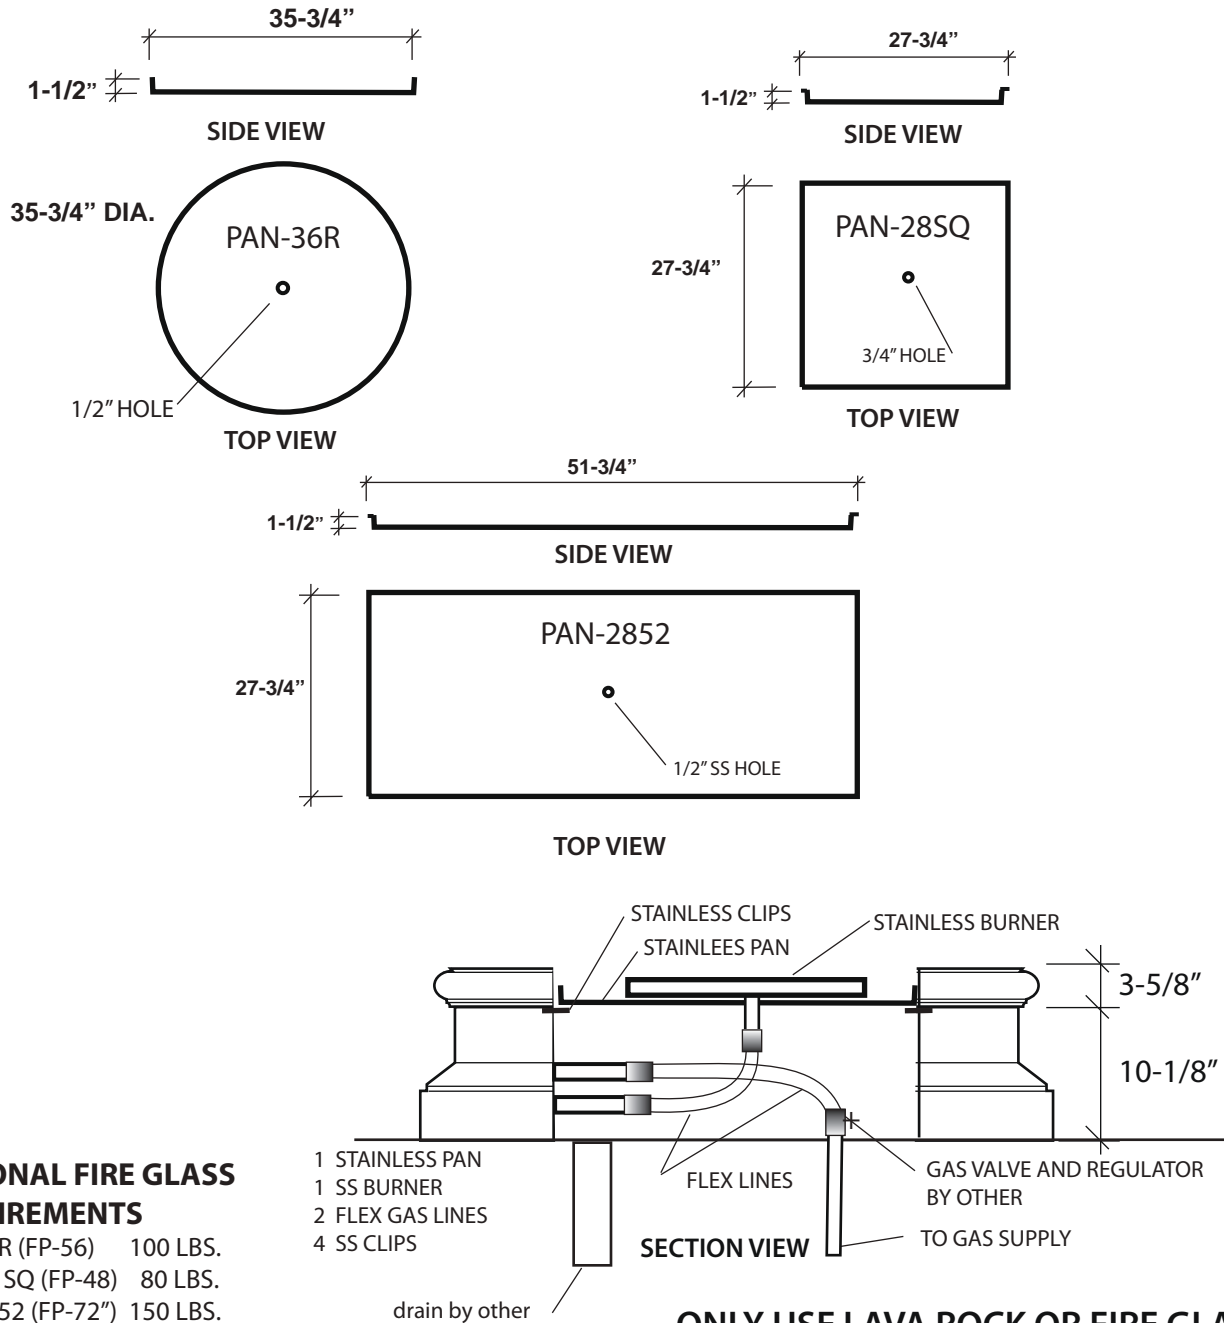

OPTIONAL FIRE GLASS REQUIREMENTS

- PAN-36R (FP-56) 100 LBS.
- PAN-28 SQ (FP-48) 80 LBS.
- PAN-2852 (FP-72") 150 LBS.

ONLY USE LAVA ROCK OR FIRE GLASS

Product	Dimensions
PAN-36R	35-3/4" DIA. X 1-1/2" DP ROUND SS PAN
PAN-28SQ	27-3/4" X 27-3/4" X 1-1/2" DP SQUARE SS PAN
PAN-2852	27-3/4" X 51-3/4" X 1-1/2" DP RECTANGLE SS PAN
BURNER-18R	18" ROUND SS BURNER
BURNER-1616	16" SQUARE SS BURNER
BURNER-1236	12" X 36" "H" SS BURNER
BK-36-ROUND	36" ROUND SS PAN, 16" SQ. SS BURNER, (2) 36" FLEX LINES
BK-28-SQ	28" SQ. SS PAN, 16" SQ. SS BURNER, (2) 36" FLEX LINES
BK-2852-RECT	28" X 52 SQ. SS PAN, 12" X 36" SQ. SS BURNER, (2) 36" FLEX LINES

FIREPIT AND FIREBOWL

1. ALWAYS KEEP A 6" MINIMUM CLEARANCE BETWEEN BURNER AND PRECAST MATERIAL.
2. ONLY USE LAVA ROCK OR FIRE GLASS.
3. ALWAYS USE A REGULATOR WHICH IS NOT INCLUDED.
4. NEVER BURN WOOD.
5. DO NOT OPERATE IN EXCESSIVELY WINDY CONDITIONS.
6. DO NOT OVERHEAT FIREPIT OR BOWL BY BURNING FLAME MORE THAN 8" HIGH.
7. WE SUGGEST THAT ALL OUR PRODUCTS SHOULD BE INSTALLED BY LICENSED PROFESSIONALS.
8. CAREFULLY FOLLOW ALL LOCAL BUILDING CODES TO PREVENT PERSONAL INJURY AND PROPERTY LOSS.